


- 1 Full fiberglass rear cap with continental spare tire cover
- 2 Stainless steel, automotive-style bumper
- 3 Fiberglass wrap to a fully enclosed underbelly
- 4 Abundance of exterior storage
- 5 Contoured fender skirts
- 6 16" 235/85 16E radial tires
- 7 Rectangular in-floor heat duct
- 8 Triple fold-a-way steps
- 9 2x4 floor joists 16" on center with 3/4" tongue and groove plywood floor
- 10 Kwikkee sliding battery tray with optional dual 105-amp deep cycle batteries
- 11 2x2 wall framing with full fiberglass insulation
- 12 Electric front jacks with independent operation
- 13 Full fiberglass underdeck cap
- 14 Large single door storage area (can be pre-wired for generator as an option)
- 15 Full fiberglass front cap with recessed clearance lights
- 16 4" fiberglass insulation
- 17 Central air conditioning duct
- 18 Full 2x4 roof rafters 16" on center
- 19 Roof fully sheathed with 3/8" decking
- 20 One-piece EPDM rubber roof laminated to 3/8" sheathing
- 21 Full sloping roof for extra interior headroom
- 22 Lighted exterior assist handles
- 23 Full view radiused, tinted picture windows
- 24 Yoder aluminum side metal or optional fiberglass bonded to plywood sheathing
- 25 Roof rack and ladder for extra exterior storage

The EPDM Rubber Roof is fully laminated to the roof structure then wrapped over the sides. This system eliminates leaks, black streaking, roof rumble, and is virtually maintenance-free. This design reduces interior temperatures by 10 to 15 degrees in the summer and is color-coordinated to match the siding.



The 2" x 4" floor joists in a Teton are held securely together by 3" screws. Teton uses this "screw together" system in all areas of "shell" construction. The screws provide a strength unparalleled in the industry... standard with Homes. The linoleum, carpet and pad are top quality. The 26 oz. carpet also has a 5-year stain release warranty and is installed over only the best REBOND 1/2" carpet pad available.

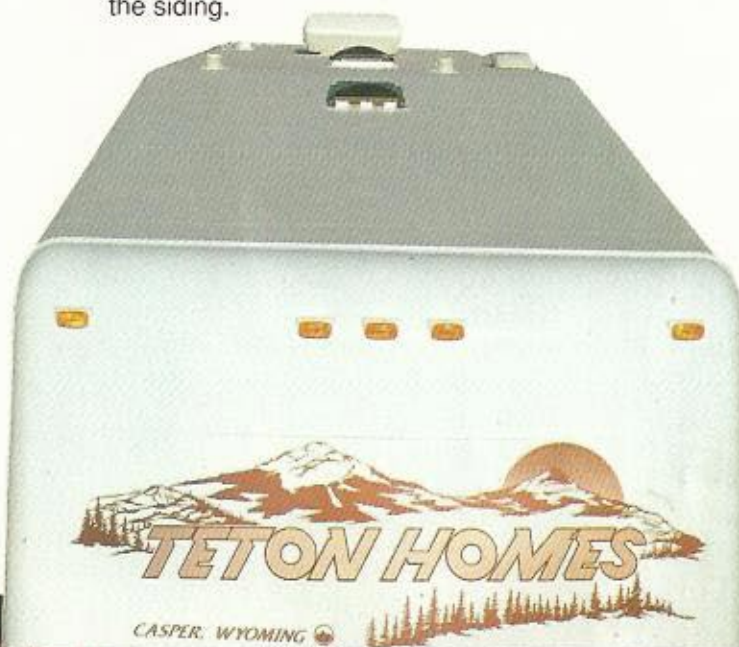

Optional fiberglass sidewalls are wired, then insulated with fiberglass batts before high-quality plywood is attached to the sidewall framing structure. When this process is completed, the fiberglass exterior panels are securely laminated to this surface. The exterior Filon® panels are gel-coated and won't chip, dent, peel or scratch. Filon® Fiberglass also comes with a 10-year warranty.