Built to Withstand the Elements 365 Days a Year

ric (no seams)

placed on our coach better

than a metal framed wall.

R19 blanket fiberglass insulation with asphalt Kraft backed vapor barrier.

Plywood 'T' joist rafters every 16 inches.

Supply and return air conditioning ducts running straight from front to rear providing unrestricted & ample air flow to all areas of the coach. 11/2" styrofoam insulation is applied to the top and bottom of these ducts. Vinyl poly film roof membrane which will not chalk, fade, mildew or discolor has less weight than conventional EPDM roofs & warrantied for 12 years against water leaks.

> Our roofs feature roof ventilators for our convection attic ventilation system, which eliminates condensation & deterioration & helps maintain even temperatures inside the coach

Felt backing under the vinyl poly film membrane provides superior bonding strength & gives greater resistance to punctures & tears.

Oriented strand board (OSB) roof sheathing secured with glue & screws to rafters. These panels are 24' long so there is only one seam on the entire roof.

36" foam pad for extra insulation & sound absorption

Teton's' T-joist roof system is one of the lightest, strongest and best insulated in the industry with a Single piece ceiling fabcomposite R value of 25.

Sidewall adhesive used over the entire area of inner components the

foam insulation

Opposing doors for

Optional sliding

storage trays can be

fully extended for

Completely level

floor! (No saddle

access & loading from

either side of the coach

bags like other brands)

entire storage area

Lighted & heated throughout

Low ground to floor spacing making it easier to load and unload your storage

flow through' storage

Teton's' central air conditioning two duct system has a 70% sound reduction from most roof ducted air conditioning systems.

panels

High gloss fiberglass for an exceptional exterior look & weathering quality

Fiberglass & lauan panels are manufactured to form a one-piece exterior skin by laying the panels into the wet fiberglass & vacu-bonding them together. This one-piece composite is then in turn applied to our vacu-bonding process of the wall frame. This means added structural integrity & durability to the customer. -



European style hidden face frame hinges mean there are no unsightly hinges or visible screws in Teton's rich oak cabinetry.



Dovetailed drawer assemblies are crafted to last and glide easily on steel epoxy enameled double roller drawer guides. Available in the Royal only.

Optional Mor-ryde "IRE" suspension system have height adjustments for taller trucks. (Trailer can be raised either 2" or 4")


Less overhang reduces frame loads with less strain on frame components.

Teton* uses 3%" x 12 %" forward self adjusting brakes which provides the safest braking system in the industry.

final component in our super strong solid composite sidewalls. 2x2 lumber framed walls designed for longevity & better insulation values 11/4" polystyrene block

Interior decor paneling Wood frame won't crack at ioints & handles the stresses

Our vacubonded sidewalls are lighter & stronger than walls with 'hand laid' up exterior glass, and feature an overall insulating value of R10.

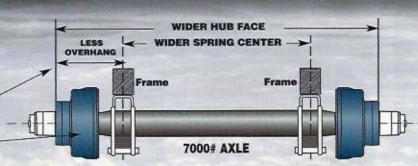


Teton's' wider hub face & spring centers provides better stability.



points through multiple doors, a level floor and opposing doors for flow-through storage makes your Teton incredibly easy to load and unload. Check out the comparison of our storage versus traditional RV storage shown at the bottom of the page and consider all the gear we packed into just ONE Teton* model (at left); about twice as much as would fit in other RV brands. Want the ultimate in easy? Ask about our optional sliding tray that can be fully extended for access and loading from either side of the coach.

ATV supplied by Karst Motorsports Sales and Service.

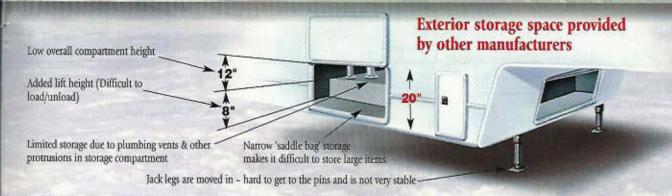

Optional 40#

LP bottles

extra-large doors

TETON HOMES